

Jule Charger

Electric Vehicle DC Fast Charger



UltraFast

- Up to 150 kW capability
- CCS + CHAdeMO compatible



User-Friendly

- No APP required
- Debit, Credit, Android or Apple direct payment
- Tiered pricing + loyalty card capabilities
- OCPP 2.0 compliant



Made to Last

- 98% Uptime
- Aluminum Housing
- -30°C Touchscreen Display

LED Lighting

Aluminum Housing

Touch Display


10" Touch Screen
Mechanical Push Buttons
-30c to +70c

Payment Terminal

Tap, Swipe or Insert
Apple/Android Pay
Credit + Debit
Loyalty Card Capability

CCS 1

CHAdeMO

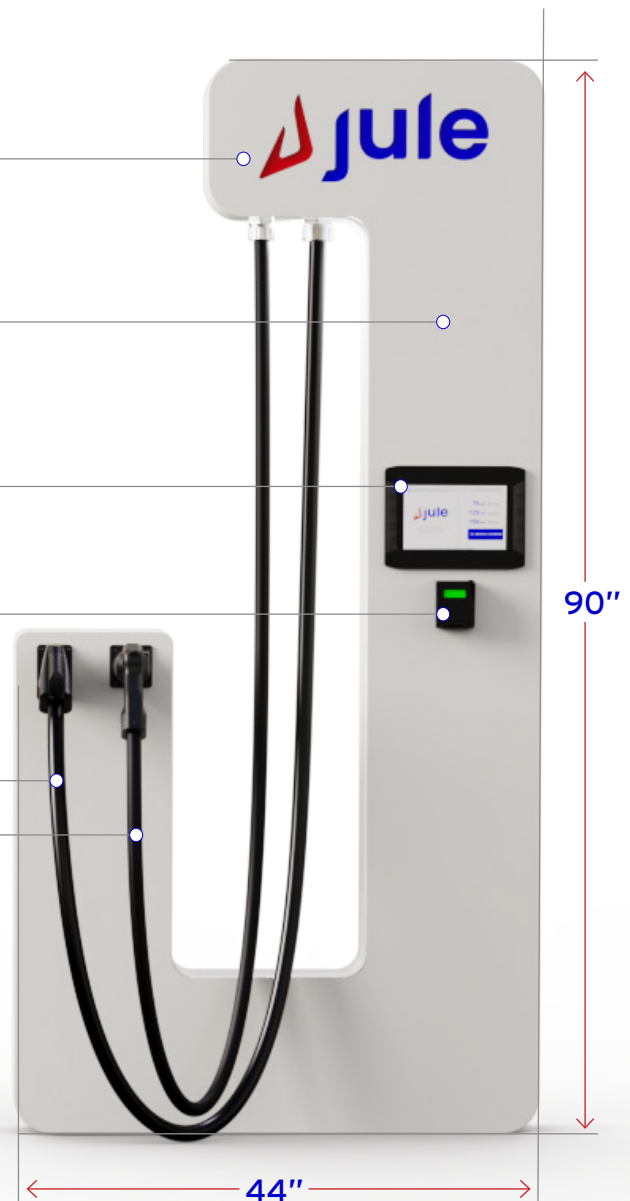

Electrical Specifications	150
Power Output Max	150 kW
Rated Max Current	CHAdeMO ¹ 125A CCS 300A
Rated Max DC Voltage	CHAdeMO 500 VDC CCS 1000 VDC

Mechanical Specifications	150
Dimensions	44" x 11" x 90"
Weight	450 lbs

Network & Components	150
Network	Ocpp 2.0 / 1.6J, JuleNet
Compliance	UL and ESA approved for USA and Canada. Complies with UL2202, IEC 61851, DIN SPEC 70121, ISO 15118, CHAdeMO, NEC Article 625, FCC Part 15 Class A
Display	10" Outdoor Ruggedized Color Touch Screen + Push Button Control
Payment	Credit + Debit + Android/Apple Pay
Supported Plug Type	CCS 1 + CHAdeMO

Environmental + Compliance	150
Environmental	-30 °C to 50 °C (-22 to 122 °F), 95% humidity, 6000 ft altitude, NEMA 3R
Compliance	UL and ESA approved for USA and Canada. Complies with UL2202, IEC 61851, DIN SPEC 70121, ISO 15118, CHAdeMO, NEC Article 625, FCC Part 15 Class A

¹ Option to omit CHAdeMO connectors

*Simultaneous charging of EV Chargers is subject to source of energy storage system (ESS) state of charge